



CONVERTIBLE COUPE TOP RAISING AND LOWERING

Observance of these instructions will eliminate likelihood of damage to the top material and facilitate the operations. . . . It is essential that the operations be performed in their proper sequence.

Operation 1. Lower all door windows.

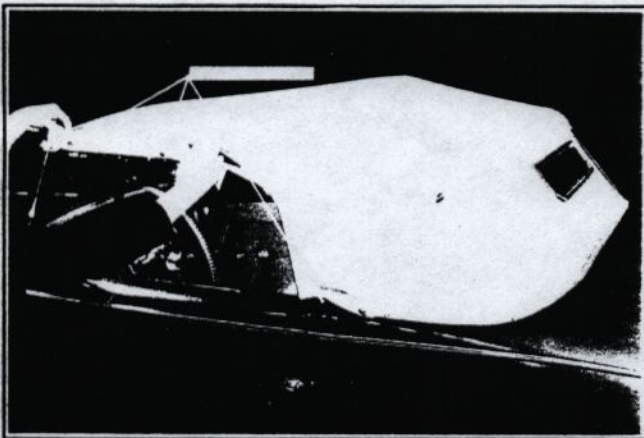

Operation 2. Unsnap glove fasteners (three on each side). Failure to do this operation before lowering the top will cause fasteners to pull through the top material.

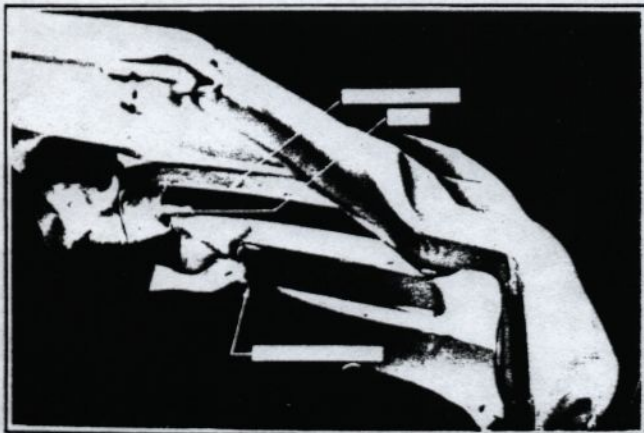

Operation 3. Loosen two thumb clamps at top of windshield.

Operation 4. Unsnap six fasteners at the top of the back curtain, pull zippers all the way down and snap curtain in two places at the bottom in package compartment, back of seat.



Operation 5. Push back light toward the rear and drop back bow all the way down.



Operation 6. Pull top pads inward to provide clearance for top joint and to avoid tearing top material.







