

ackard **SERVICE TECHNICAL** **bulletin**

50T-49

Dealer 36

November 24, 1950


To: ZONES AND DEALERS

Subject: STEERING GEAR OIL LEVEL - 24TH SERIES

The Factory specification on the amount of oil to be used in the steering gear housing recently was changed from eleven ounces to nine ounces to reduce the possibility of oil seepage through the shaft opening in the housing.

Filling the gear housing with nine ounces of oil establishes an oil level approximately one inch below the filler plug opening. It is recommended that this level be maintained on vehicles in service.

Yours very truly,

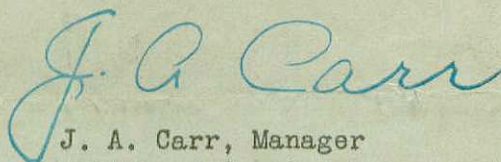

J. A. Carr, Manager
Parts and Service Department

JAC:ljc