



**Packard SERVICE TECHNICAL**



**Bulletin**

52T-12  
Dealer 8  
February 18, 1952

To: ZONES AND DEALERS


Subject: DOOR LOCKING ROD AND KNOBS  
25TH SERIES

A new type door locking knob will soon be released in production. This change affects the method of removing and installation.

When the knobs are removed for any reason, they may be cut off or heated to 150°F before they can be pulled off. It may be advisable to replace the knobs with new knobs whenever they are removed.

To install, it is recommended to heat the knob to 150°F to soften; then push them onto the rod to their proper position. This will facilitate the installation with less danger of damage as the knob is pushed on over the serrations on the rod.

Very truly yours,

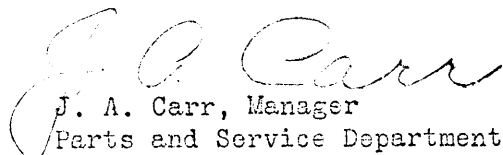

J. A. Carr, Manager  
Parts and Service Department

JAC:mg