



Packard **SERVICE TECHNICAL**

Bulletin

EST-16
Dealer 13
August 10, 1953

To: ZONES AND DEALERS

Subject: REAR AXLE HYPOID BREAK-IN OIL
26th SERIES

Due to the close tolerances used in the new 26th Series rear axle, it is very important that the proper lubricant is used during the break-in period.


Effective immediately, a can of Hypoid Break-in Oil, part number 410707, will be shipped with each differential carrier assembly and/or with each ring and pinion gear set.

This Break-in Oil must be put in the rear axle whenever a new carrier assembly or a ring and pinion gear set has been installed.

It is not necessary to drain out this oil after the break-in period as it can be left in until the seasonal gear oil change.

NOTE: New differential carrier assemblies or reconditioned carriers should always be driven slowly during the break-in period (approximately 500 miles), in other words, the same as breaking in a new car. This also applies to new Ultramatic units, reconditioned Ultramatic units as well as new or reconditioned engines. You should caution your owners that when any new parts or units are installed, these new parts will require a break-in period.

Very truly yours,

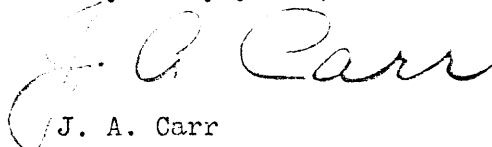

J. A. Carr
General Service Manager

JAC:hj