

Packard **SERVICE TECHNICAL**
Bulletin

54T-12
Dealer 7
May 21, 1954


To: ZONES AND DEALERS

Subject: OIL FILTER CARTRIDGE CHANGE PERIOD REVISED

Recently a change was made in service recommendations whereby the Oil Filter Cartridge should be replaced at 4000 mile intervals instead of every 8000 miles.

With the use of today's highly detergent lubricating oils, the sludge and foreign impurities are held in suspension. The filtering element is therefore able to remove a greater amount of these impurities and consequently the filter cartridge becomes clogged at an earlier mileage.

Very truly yours,

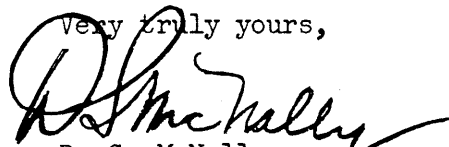

D. S. McNally
General Parts and Service Manager

HGL:mal