



TOE SWITCH LEADS ARE DISCONNECTED FROM PACKARD TERMINAL STRIP AND ROUTED TO RELAY PINS 85 RELAY PINS 86 ARE GROUNDED 6 VOLT NEGATIVE CABLE IS CONNECT TO EITHER SIDE OF BUSS BAR OUTPUT OF CIRCUIT BREAKERS ARE ROUTED TO RELAY PINS 30 OUTPUT OF RELAYS, PINS 87 ARE ROUTED TO PACKARD TERMINAL STRIP

HR = HIGH BEAM RELAY LR = LOW BEAM RELAY



GROUND

## HEAD LIGHT RELAY CIRCUIT

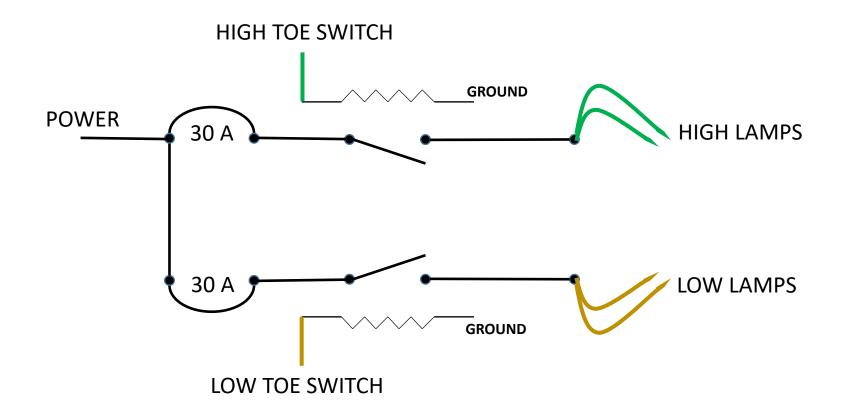

Colored wires represent existing headlight wiring. Black segments represent new wiring and/or components.