

UNITED MOTORS


Packard

472047

472048

Packard

6480488
(7266067)
6480489
(7266047)

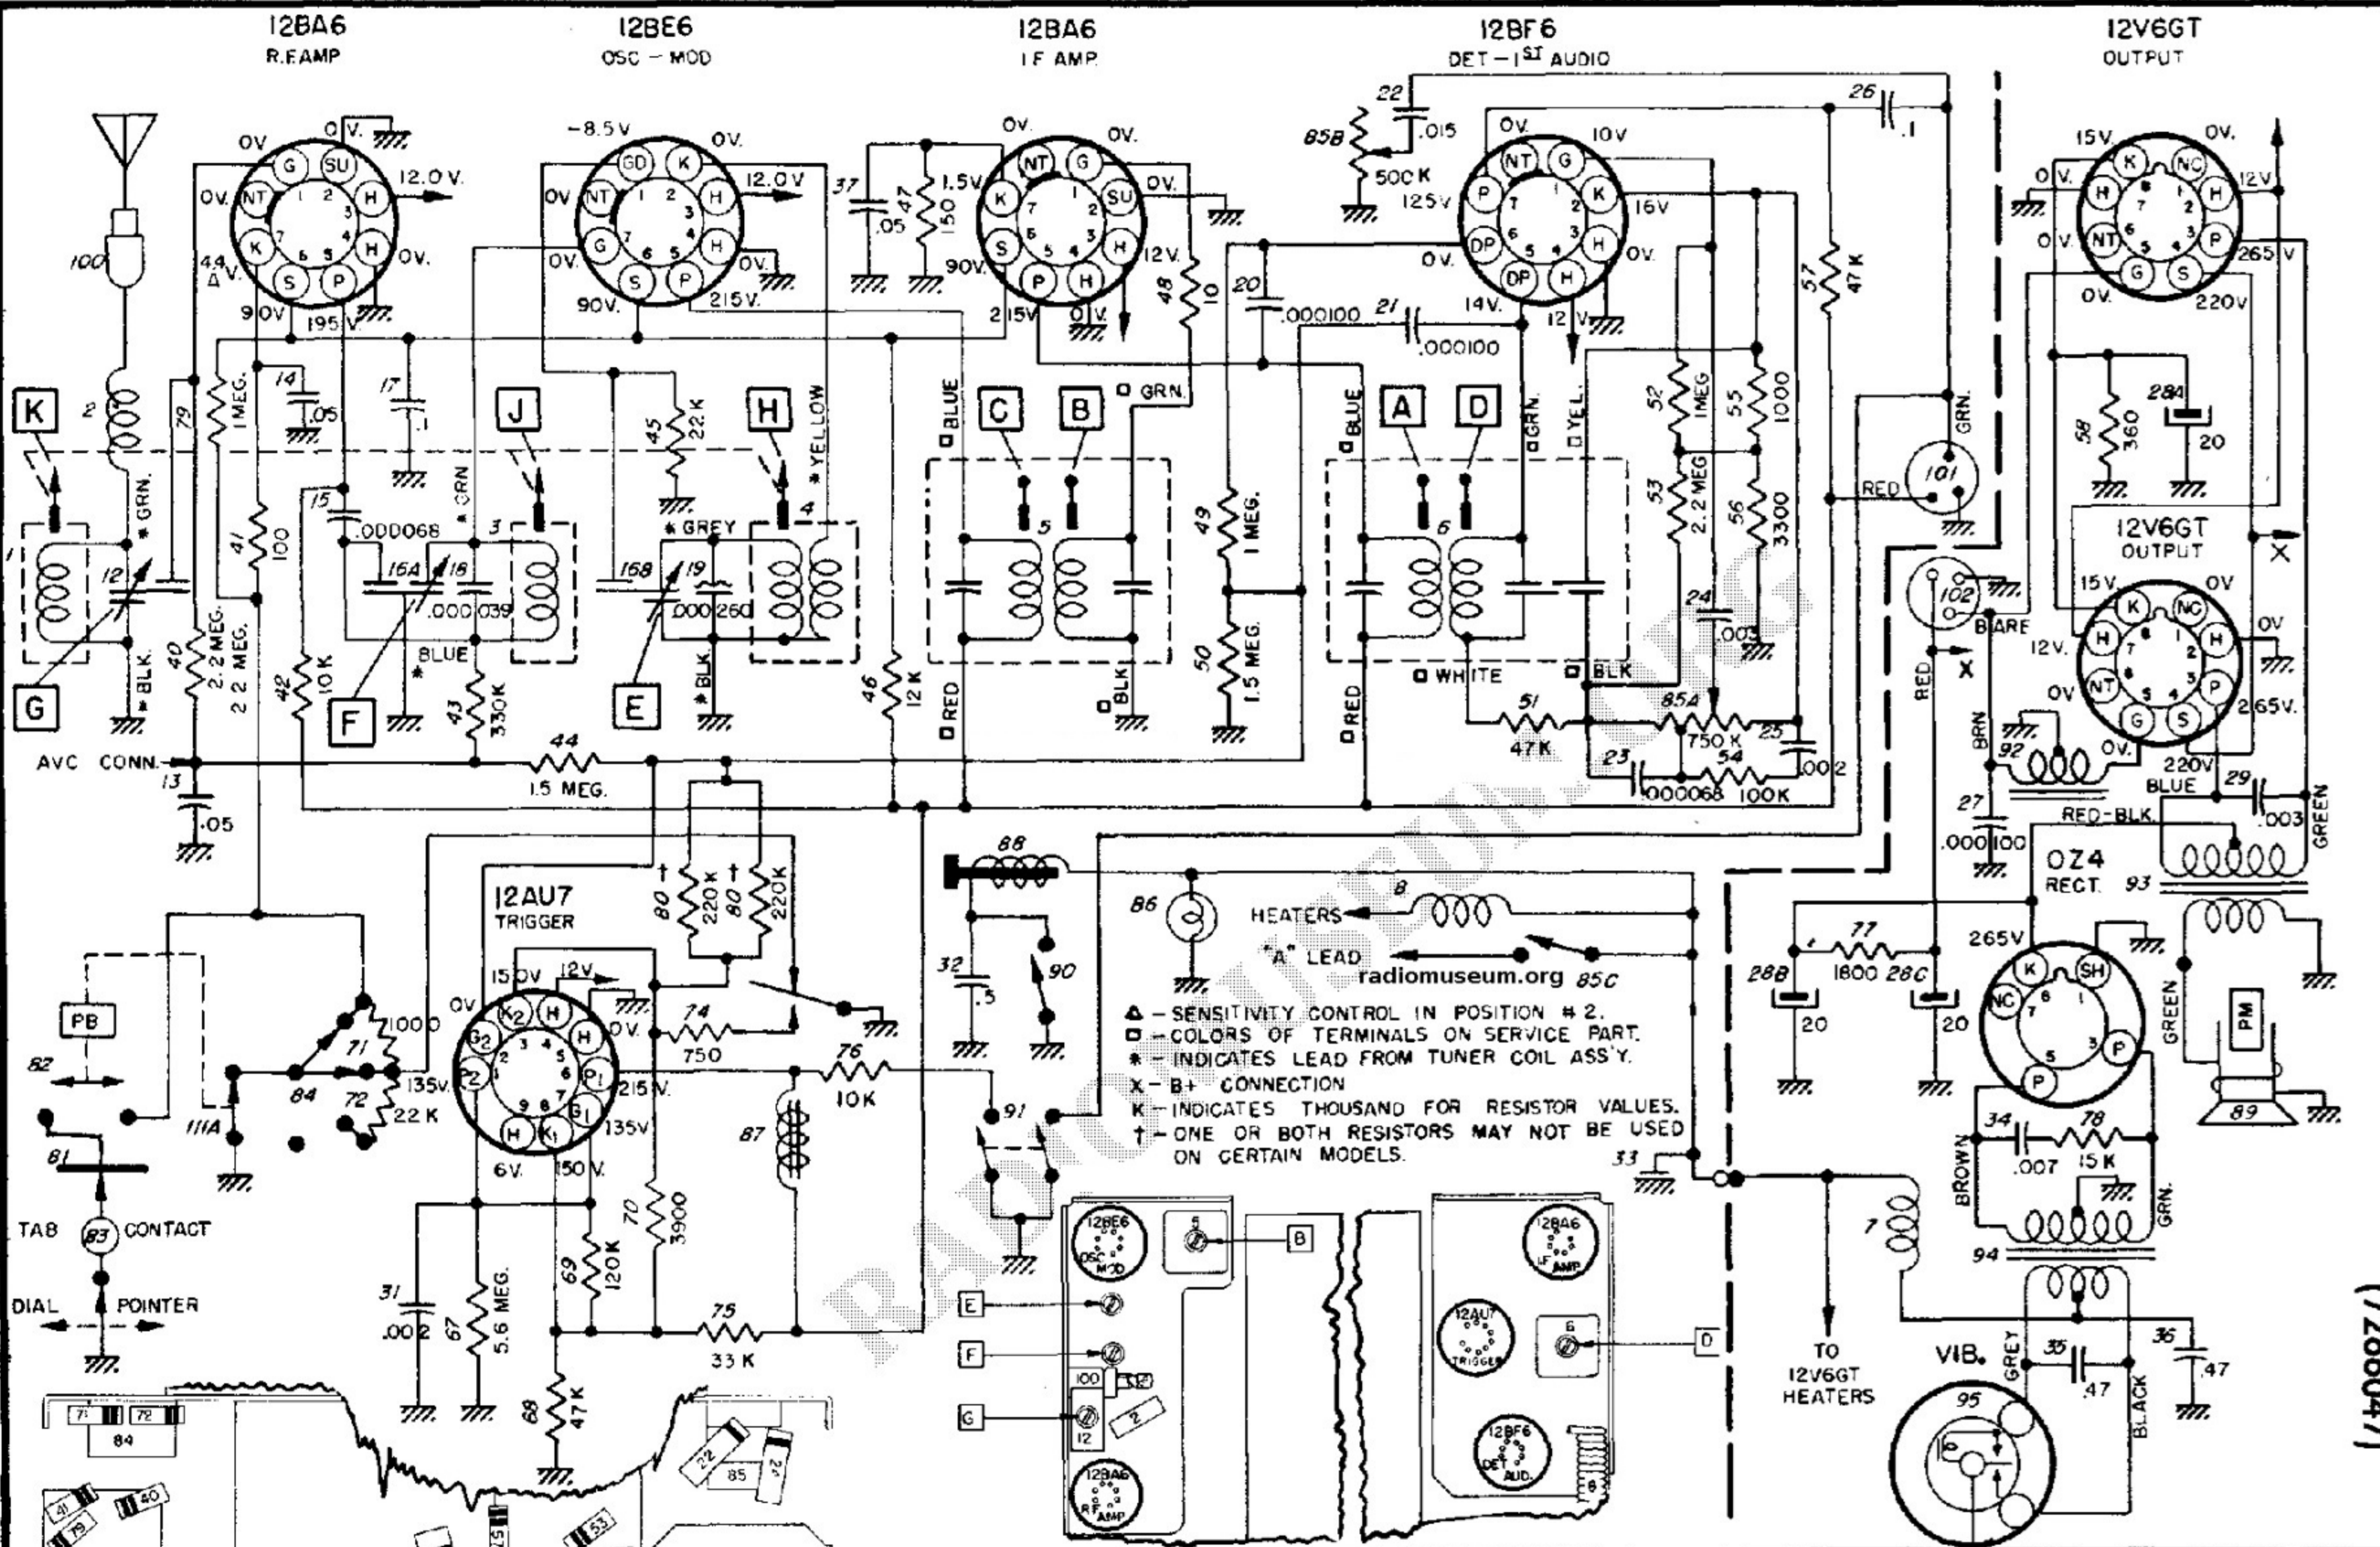

Step	Dummy Antenna	Connect To	Signal Generator Frequency	Tune Receiver To	Adjust in Sequence for Output Indicated
1	0.1 Mfd.	12BE6 Grid (Pin 7)	260 KC	High Freq. Stop	A, C, B Max.
2	0.1 Mfd.	12BE6 Grid (Pin 7)	260 KC	High Freq. Stop	D Min.
3	0.000068 Mfd.	Antenna Connector	1615 KC	High Freq. Stop	E, F, G Max.
4	0.000068 Mfd.	Antenna Connector	600 KC	Signal Gen. Signal	J, K Max.
5	0.000068 Mfd.	Antenna Connector	1615 KC	Signal Gen. Signal	F, G Max.

